



GLOBAL[®] HAND DRYER SERIES SPECIFICATIONS



White ABS



Steel White Epoxy



Steel Satin Chrome

VANDAL RESISTANT • 2-YEAR WARRANTY

THE **GLOBAL[®]** SERIES PROVIDES A QUIET AND COMPACT DESIGN TO FIT ANY BUDGET.

Heavy-Duty, One-Piece Cover Options:

- Flame-retardant white ABS
- Steel with white epoxy finish (M)
- Steel with satin chrome finish (C)

Vandal Resistant: Tamper-resistant screws secure cover to base. Air intake vents are shielded for additional safety.

Motor: Permanently lubricated, maintenance-free, brushless induction motor with automatic resetting thermal protector. 1/12 HP, 3100 RPM.

Automatic Sensor: Energy-efficient, microprocessor-controlled sensor turns dryer on when hands are under the outlet for up to 60 seconds. Standby power is only one watt. Features RoHS compliant lead-free design.

Heating Element: Constructed of NiChrome resistance wire with thermal protector. Heating element operates in the black range for maximum life.

2-year Limited Warranty: Includes same-day factory repair or part replacement. See owner's manual for details.

GLOBAL SPECIFICATIONS

| | |
|--------------------|----------------------------------|
| Dry Time | 40 Seconds |
| Air Flow | 120 CFM (Cubic Feet per Min.) |
| Air Velocity | 4,000 LFM (Liner Feet per Min.) |
| Sound Level | 63 dB (Quietest in its class) |
| Air Temperature | 120° F at 72° F room temperature |
| Power | 110-120 V 50/60Hz 12 A 1500 W |
| Dimensions Surface | 10-1/8" W x 9-3/8" H x 5-5/8" D |

GLOBAL MODEL REFERENCE CHART

| | |
|--------------------|-------|
| White ABS | GX1 |
| Steel White Epoxy | GX1-M |
| Steel Satin Chrome | GX1-C |

ACCESSORIES




| | | |
|-----------------------------|-----------------------------|----------------------------|
| ADA-WG WALL GUARD | ADA-RK RECESS KIT | AP ADAPTER PLATE |
|-----------------------------|-----------------------------|----------------------------|

| Accessories Reference Chart | |
|-----------------------------|---|
| ADA-WG | ADA Compliant seamless stainless steel wall guard |
| ADA-RK | ADA Compliant seamless stainless steel recess kit |
| AP | Stainless steel universal adapter plate |

For more information, visit americandryer.com

GX SERIES MOUNTING DIAGRAMS

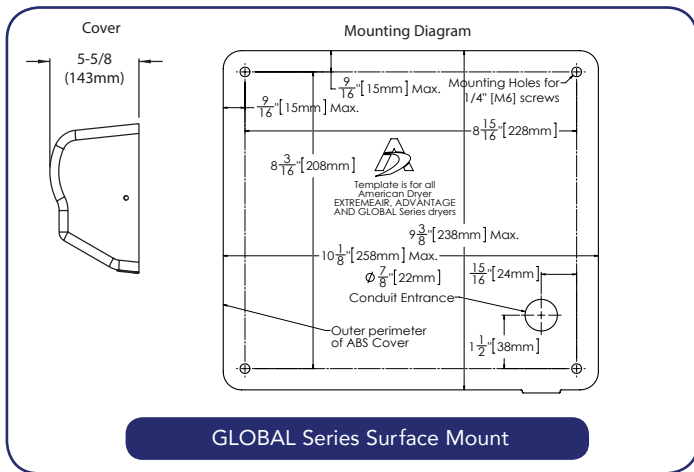

GLOBAL Series Surface Mount

| RECOMMENDED MOUNTING HEIGHTS FROM BOTTOM OF DRYER TO FINISHED FLOOR | | | | |
|---|-----|-------|-----------|----------|
| | Men | Women | Children | Disabled |
| All Hand Dryers | 44" | 42" | 32" - 42" | 36" |



American Dryer, Inc.

5700 McDermott Drive | Berkeley, IL 60163 | U.S.A.
Toll Free 800.485.7003 U.S. | Ph: 734.421.2400 | Fax 734.421.5580

Web: americandryer.com

Email: sales@americandryer.com

© American Dryer, Inc. All Rights Reserved

Revised June 2015

SAVE 95% VERSUS PAPER TOWELS

GX Series Hand dryers achieve up to a 95% cost savings over paper towels. These savings are realized by eliminating the maintenance and operating expenses associated with paper or linen towels.

"Our school saved over \$21,000 last year with American Dryer!"

| Cost Analysis for a Public School | |
|-----------------------------------|-----------------|
| Paper Towel Usage | 800 Cases |
| Total Paper Costs | \$24,000 |
| Hand Dryer Operating Costs | \$2,453 |
| ANNUAL SAVINGS | \$21,547 |
| Payback Time | 11 Months |

| Cost Analysis for a Restaurant | |
|--------------------------------|----------------|
| Paper Towel Usage | 90 Cases |
| Total Paper Costs | \$2,025 |
| Hand Dryer Operating Costs | \$96 |
| ANNUAL SAVINGS | \$1,929 |
| Payback Time | 12 Months |

GENERAL INFORMATION

DRYER PLACEMENT:

Dryers should be placed at least 2 feet apart and at least 12" from washbasin. Do not install dryer over washbasin. Automatic dryers should be at least 18" above any projection which may interfere with the operation of the automatic sensor. In congested areas the dryers should be located to create a flow from the washbasin to the dryer and to the exit. Recommended mounting heights are shown in the table below.

DRYER INSTALLATION:

Dryers must be installed by a licensed electrician. A single phase dedicated 15 amp or 20 amp electrical line is required. Dryers must be properly grounded. One side of dryer should be mounted to a stud. All surface mount dryers are provided with conduit entrances for both in-wall and surface wiring. For indoor use only.

QUANTITY ESTIMATE, HAND DRYER:

Average traffic washroom.....1 dryer per 2 washbasins
Heavy traffic washroom.....1 dryer per washbasin
54" wash fountain.....4 dryers per sink

SHIPPING WEIGHT: ABS 8 lbs, M/C 10 lbs

Printed on Recycled Paper

